

Remote Indicator C-9314P



Technical Specifications

- Operating voltage: 2.5 to 3Vdc
- Operating Current: 15mA
- Operating temperature: -10°C to +50°C
- Relative humidity: 95%
- Indicator: LED, red
- Application: Indoor use
- Material and colour: ABS, white, red
- Wiring: 1 pair polarized
- Dimensions: 650mm x 650mm x 350mm

Features and Benefits


1. Highlight LED
2. Wall mounting. Easy installation and connection.

Description

The C-9314P Remote Indicator is used to display the alarms of the detector. Suitable application if the detector installed inside the room, false ceiling and underground cable. When the unit alarm, the LED on the lamp will light so that the personnel can identify that the detector was triggered alarm without entering to room.

Wiring and Connection

Connect the wires to the required terminal according to the wiring diagram. From Terminals 2 and 4 of detector base. Connect terminal 2 to (+) positive unit as well as terminal 4 to (-) negative terminal. The cable must be fire rated type and the distance between the detector and remote indicator must not exceed 50 meters.

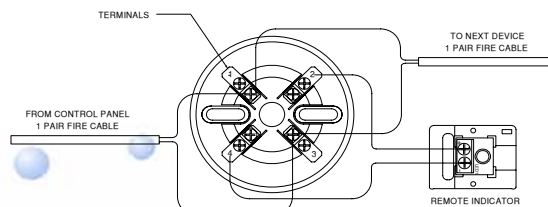

Selection of compatible detector

- ✓ D/I-9102 Optical Detector with Remote Indicator Output
- ✓ D/I-9103 Dual Heat Detector with Remote Indicator Output
- ✓ D/C-9102 Conventional Optical Smoke Detector with Remote Indicator Output
- ✓ DC-9103 Conventional Dual Heat Detector with Remote Indicator Output

Ordering Information:

Part No	Description	Weight /Kg	Pack Qty per Box
C-9314P	Remote Indicator	0.03	100

MANUFACTURED IN ACCORDANCE WITH



Note: Specifications are subject to change without notice.

